




W6 x 9 OR W6 x 8.5
STEEL POST
See Note 4

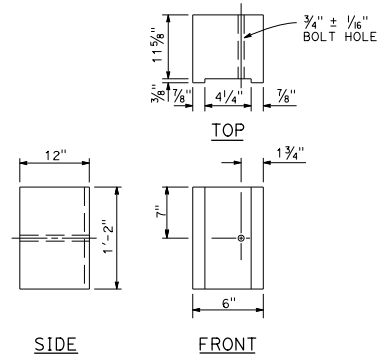


6" x 12"
NOTCHED WOOD BLOCK
See Notes 2, 3 and 7

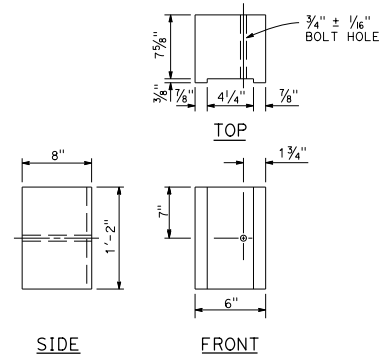


6" x 8"
NOTCHED WOOD BLOCK
Only for use with metal beam guard railing. See Note 5

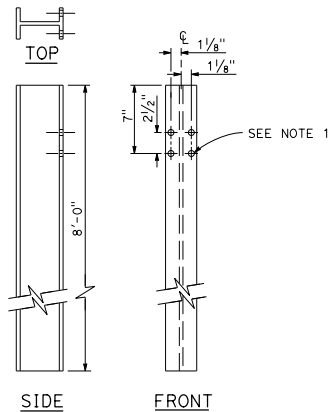


W6 x 9 OR W6 x 8.5
STEEL POST
See Note 6

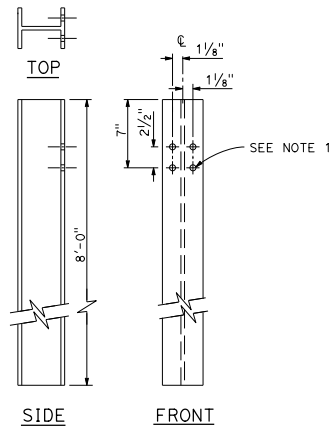

W6 x 15
STEEL POST

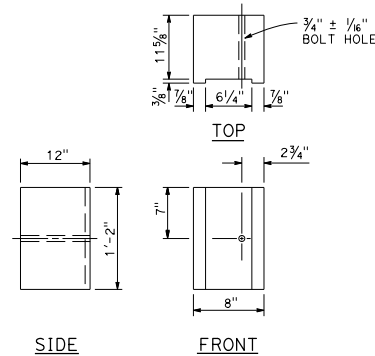

8" x 12"
NOTCHED WOOD BLOCK
See Notes 2, 3 and 7

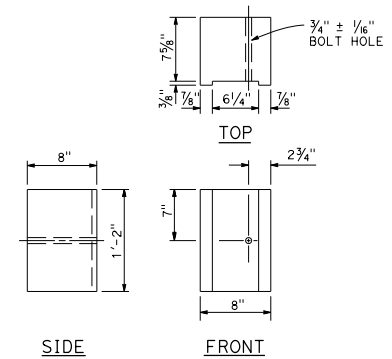

8" x 8"
NOTCHED WOOD BLOCK
Only for use with metal beam guard railing. See Note 5

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL SHEETS
RANDALL D. HIATT REGISTERED CIVIL ENGINEER May 31, 2018 PLANS APPROVAL DATE No. C50200 EXP. 6-30-19 CIVIL STATE OF CALIFORNIA				

NOTES:

1. All holes in steel post shall be 1/8" Dia maximum.
2. Dimensions shown for wood block are nominal.
3. Notched face of block faces steel post.
4. 6'-0" length posts to be used for typical roadway installation. See Standard Plan A77N3.
5. See Standard Plan A77L3 for use of 6" x 8" and 8" x 8" notched wood blocks.
6. This post and 8" x 12" block combination to be used for line post sections of MGS on narrow roadways and where strengthened line post sections of MGS are warranted to shield fixed objects.
7. 6" x 12" notched wood block and 8" x 12" notched wood block must be used with 6" dike.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
MIDWEST GUARDRAIL SYSTEM
STEEL POST AND
NOTCHED WOOD BLOCK DETAILS
NO SCALE

A77N2